


ABS2



PRESTA



Open Presta valve and pull sleeve back on ABS2 chuck.

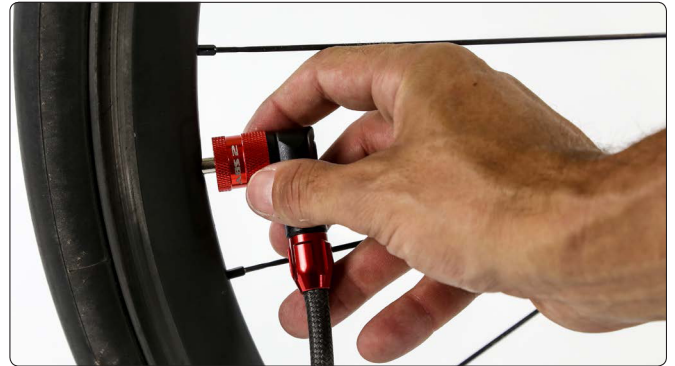

Press onto valve, slide sleeve forward and rotate sleeve until snug.



Inflate to desired pressure and use the bleed valve to adjust pressure.



Pull sleeve back to instantly release the ABS2.

SHRADER



Slide sleeve forward and thread onto Shrader valve.



Inflate to desired pressure and use the bleed valve to adjust pressure.



Unthread to remove ABS2.



Go to www.lezyne.com for more information.