





355 Cane Creek Rd, Fletcher NC USA 28732

canecreek.com | 828-641-9560

Stem Installation Instructions

*Take note that the GXC stem **needs +44mm of steerer tube to be installed correctly.***

1. Remove your existing stem.
2. Install the GXC stem on your bicycle's steerer tube. **Steerer tubes should extend completely through the stem for proper clamping pressure and safety.** It is recommended to have a minimum of 2mm of steerer tube extend above the stem and use a 5mm headset spacer between the stem and headset top cap. More than a 5mm spacer above and more than 40mm of spacers below the stem is not recommended.
3. Install handlebar to stem tightening stem faceplate bolts in an alternating X pattern and torque to 5Nm.
4. Center/align stem to front wheel and torque stem clamp bolts to 5Nm

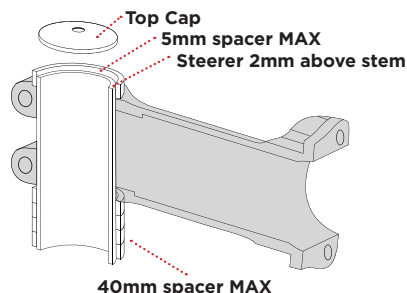

Warranty Information

LIMITED ONE (1) YEAR WARRANTY ON CANE CREEK GXC STEM

eeSilk stem is warranted against defects in materials or workmanship for one year from the date of purchase. This warranty applies to the original owner only. At their discretion, Cane Creek Cycling Components will repair or replace any defective stem with the same or comparable model. This warranty is void if the stem is damaged as a result of abuse, alterations, modifications, improper adjustment, lack of maintenance, crashes, or other conditions judged by Cane Creek Cycling Components to be abnormal, excessive, or improper. It is mandatory that a Return Authorization Number (RA#) is received (by calling or emailing Cane Creek) before any return is made. Additionally, a dated Proof of Purchase must accompany the stem when returned.